


# CADRU TRANSVERSAL AX E

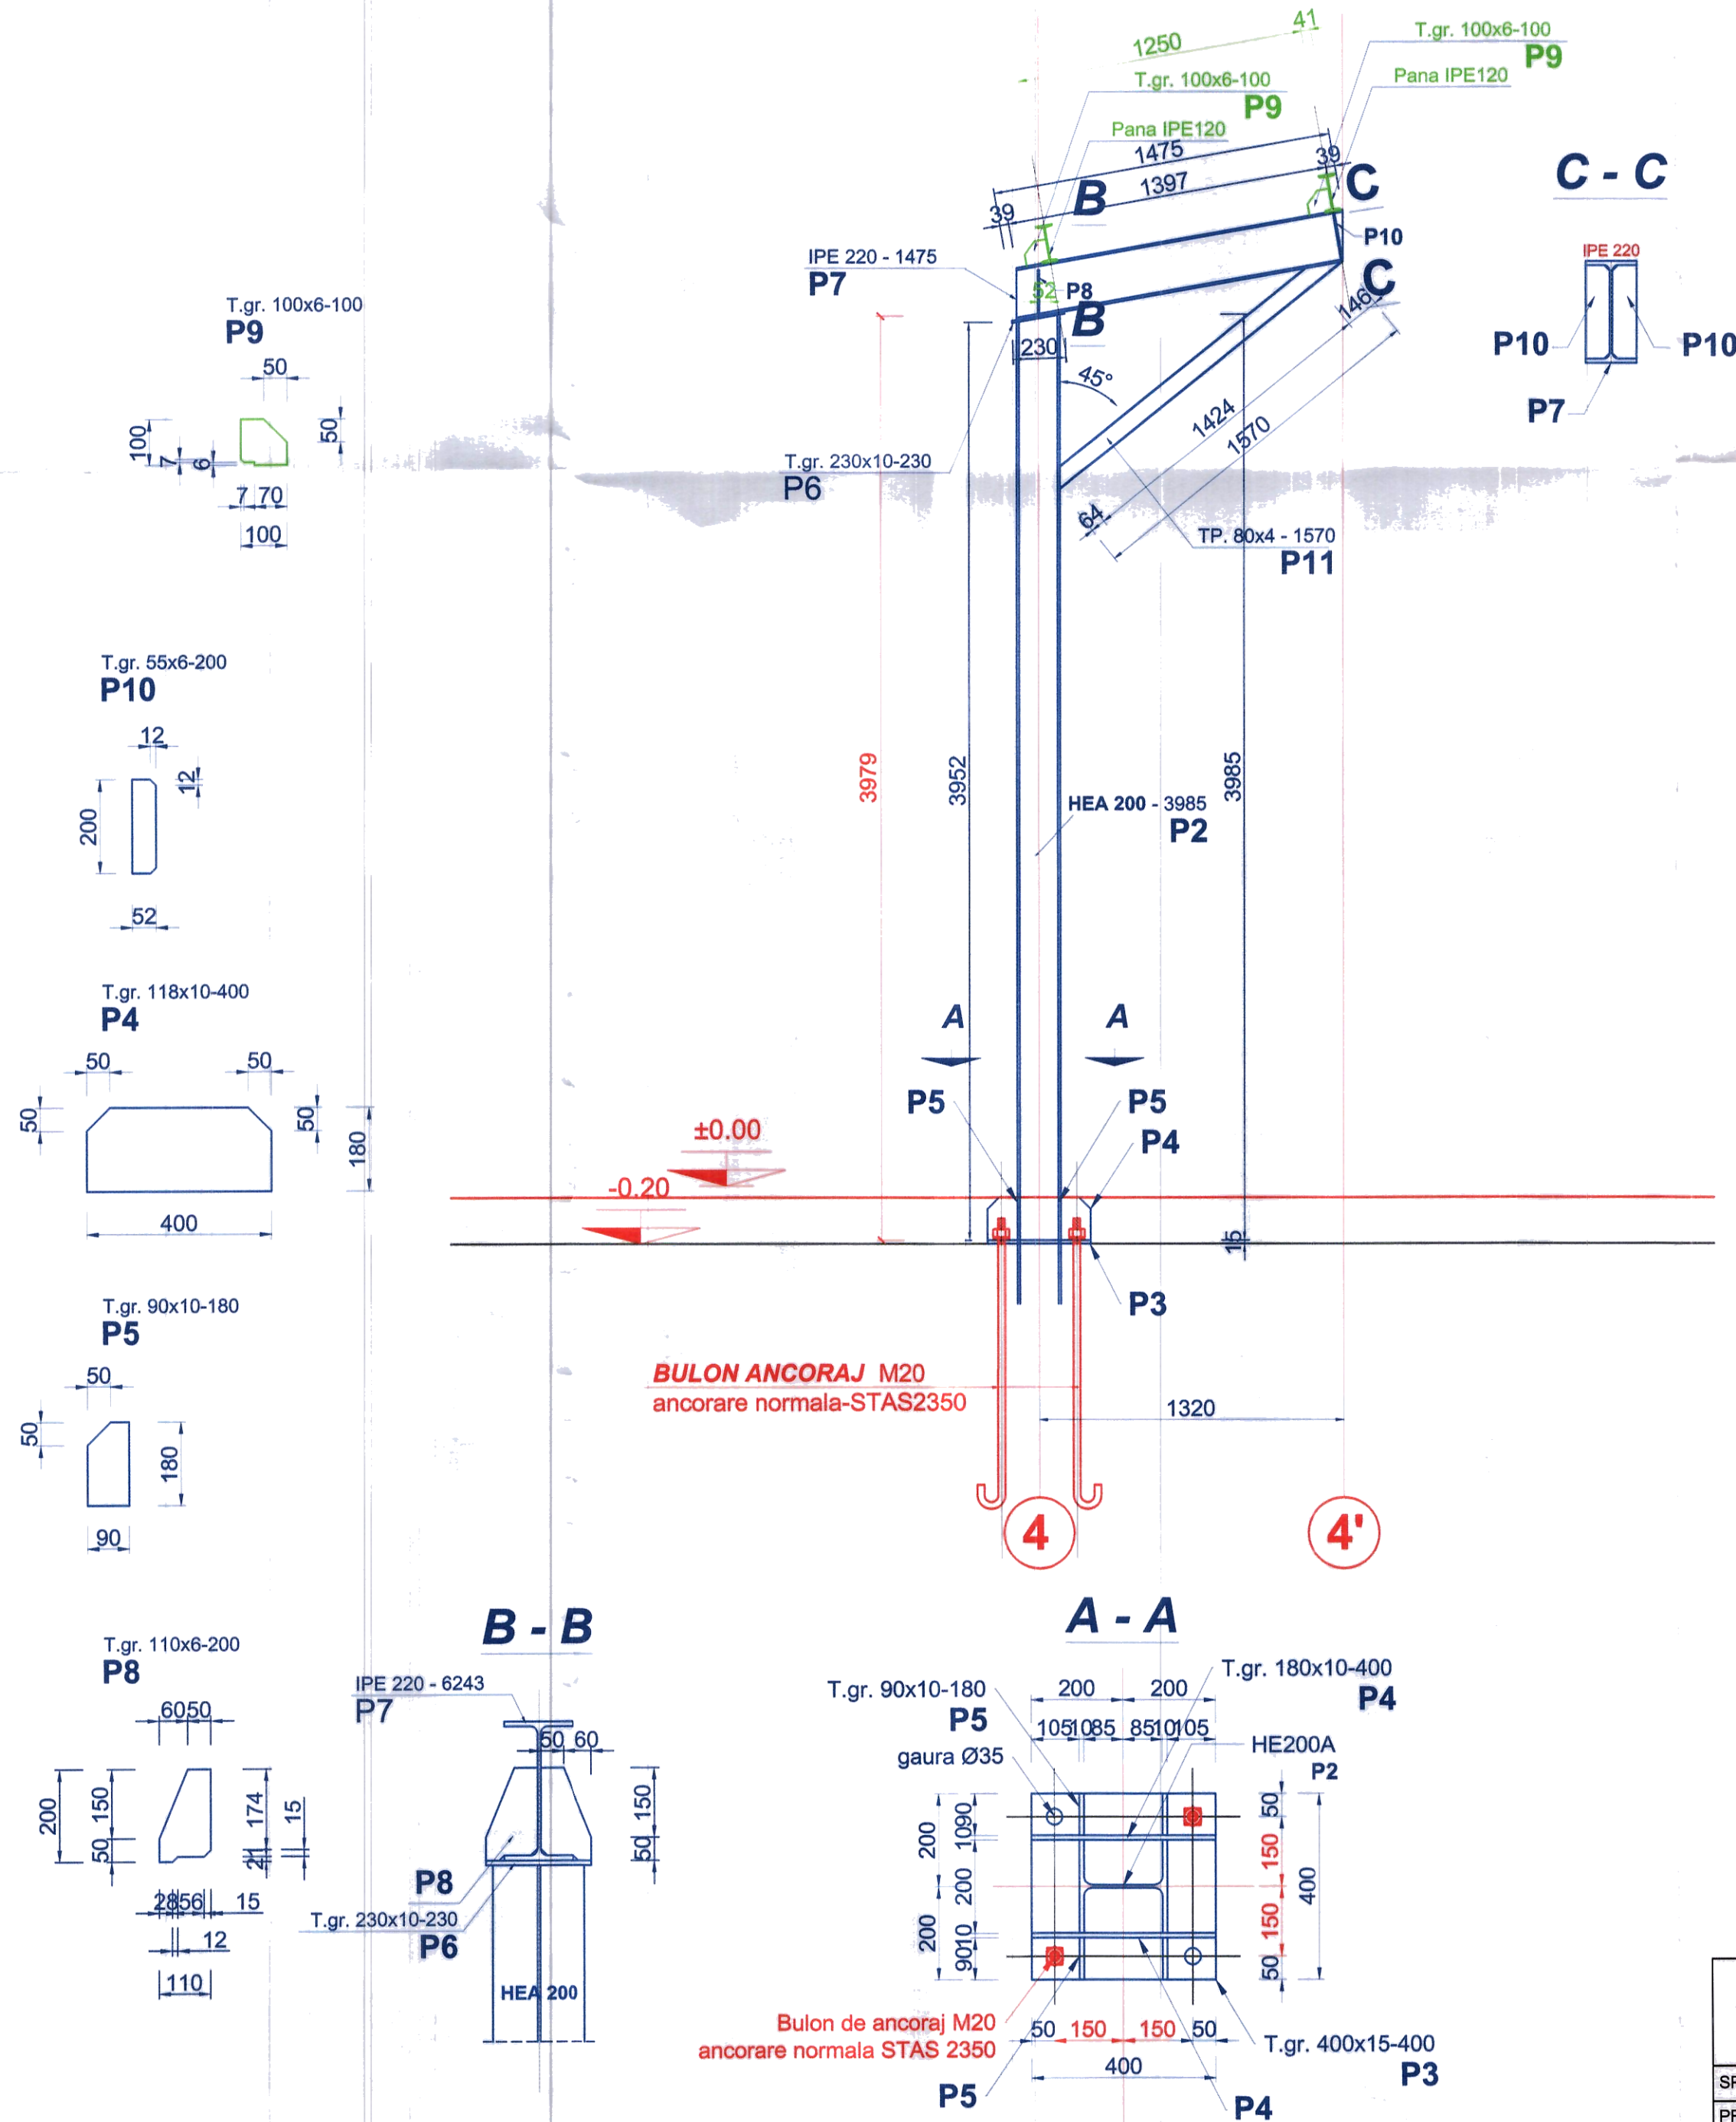

EXTRAS DE LAMINATE CADRU TRANSV. AX A - 1 Buc.							
POZ.	DIMENSIUNI		LUNG.	NR. BUC.	GREUTATE		
	latime	grosime	(M)		UNITARA	PE BUC.	TOTALA
P2	HEA200	0	3,985	1	42,3	168,5655	168,5655
P3	0,45	0,015	0,45	1	120	24,3	24,3
P4	0,18	0,008	0,4	2	64	4,608	9,216
P5	0,115	0,008	0,18	4	64	1,3248	5,2992
P6	0,23	0,01	0,23	1	80	4,232	4,232
P7	IPE220	0	1,475	1	26,2	38,645	38,645
P8	0,11	0,006	0,2	2	48	1,056	2,112
P9	0,1	0,006	0,1	2	48	0,48	0,96
P10	0,055	0,006	0,2	2	64	0,704	1,408
P11	TP80x4	0	1,57	1	9,41	14,7737	14,7737
					<b>TOTAL</b>	<b>1CADRU</b>	<b>269,5114</b>
					SUDURA + ELECTROZI:5%		13,47557
					<b>TOTAL GEN.</b>		<b>282,987</b>

EXTRAS DE LAMINATE CADRU TRANSV. AX A - 1 Buc.							
POZ.	DIMENSIUNI		LUNG.	NR. BUC.	GREUTATE		
	latime	grosime	(M)		UNITARA	PE BUC.	TOTALA
P2	HEA200	0	3,985	1	42,3	168,5655	168,5655
P3	0,45	0,015	0,45	1	120	24,3	24,3
P4	0,18	0,008	0,4	2	64	4,608	9,216
P5	0,115	0,008	0,18	4	64	1,3248	5,2992
P6	0,23	0,01	0,23	1	80	4,232	4,232
P7	IPE220	0	1,475	1	26,2	38,645	38,645
P8	0,11	0,006	0,2	2	48	1,056	2,112
P9	0,1	0,006	0,1	2	48	0,48	0,96
P10	0,055	0,006	0,2	2	64	0,704	1,408
P11	TP80x4	0	1,57	1	9,41	14,7737	14,7737
					<b>TOTAL</b>	<b>1CADRU</b>	<b>269,5114</b>
					SUDURA + ELECTROZI:5%		13,47557
					<b>TOTAL GEN.</b>		<b>282,987</b>

<div>S.C. ARHIAMAR STRUCTURI DESIGN S.R.L.</div> <div><div>SOCIETATE COMERCIALA CU CAPITAL DE STAT ARHIAMAR STRUCTURI DESIGN PITESTI ROMANIA</div></div>		<div>Beneficiar :</div> <div>SPITALUL DE RECUPERARE BRADET</div> <div>Proiect CONSTRUCTIE SALA VESTIARE PERSONAL SI CIRCUIT SEPARARE TRANSPORT LENJERIE COMUNA BRADULET, SAT BRADETU, JUD. ARGES</div>		<div>Pr : 138</div>
SPECIF.	NUME	<div><div></div><div>Faza. P.T.</div></div>	Data : 2022	Pl. nr: R11r1
PROIECTAT	ing.Gheorghe PINTILIE		<div>CADRU TRANSVERSAL AX E</div>	Scara:
DESENAT	ing.Gheorghe PINTILIE			