



DENUMIRE CIRCUIT	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	CP1	CP2	CP3	CP4	R1	CP6	CP7
Pi [kW]	0.567	0.567	0.567	0.567	0.63	0.57	0.441	0.24	0.65	0.65	0.65	0.5	2	2	2	2	0	2	2
Pd [kW]	0.567	0.567	0.567	0.567	0.63	0.57	0.441	0.24	0.65	0.65	0.65	0.48	2	2	2	2	0	2	2
Ic [A]	2.74	2.74	2.74	2.74	3.04	2.75	2.13	1.16	3.14	3.14	2.32	2.42	9.66	9.66	9.66	9.66	0.00	9.66	9.66
Sect. CYTF [mm²]	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x1,5	N2XH 3x2,5	N2XH 3x2,5	N2XH 3x2,5	N2XH 3x2,5	0	N2XH 3x2,5	N2XH 3x2,5
PROTECTIE	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/10A	1P+N/16A/30mA	1P+N/16A/30mA	1P+N/16A/30mA	1P+N/16A/30mA	1P+N/10A	1P+N/16A/30mA	1P+N/16A/30mA
REPARTITIE FAZA	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L2	L3	L1	L2	L1,L2,L3	L1	L2
DESTINATIE	Circ ilum gen saloane	Circ ilum gen saloane	Circ ilum gen saloane	Circ ilum gen saloane	Circ ilum gen saloane	Circ ilum cabinete	Circ ilum cabinete	Circ ilum cabinete	Circ ilum cabinete	Circ ilum console	Circ ilum console	Circ ilum console	Circ prize console	Circ prize console	Circ prize salon	Circ prize salon	Rezerva	Circ prize console	Circ prize cabinete

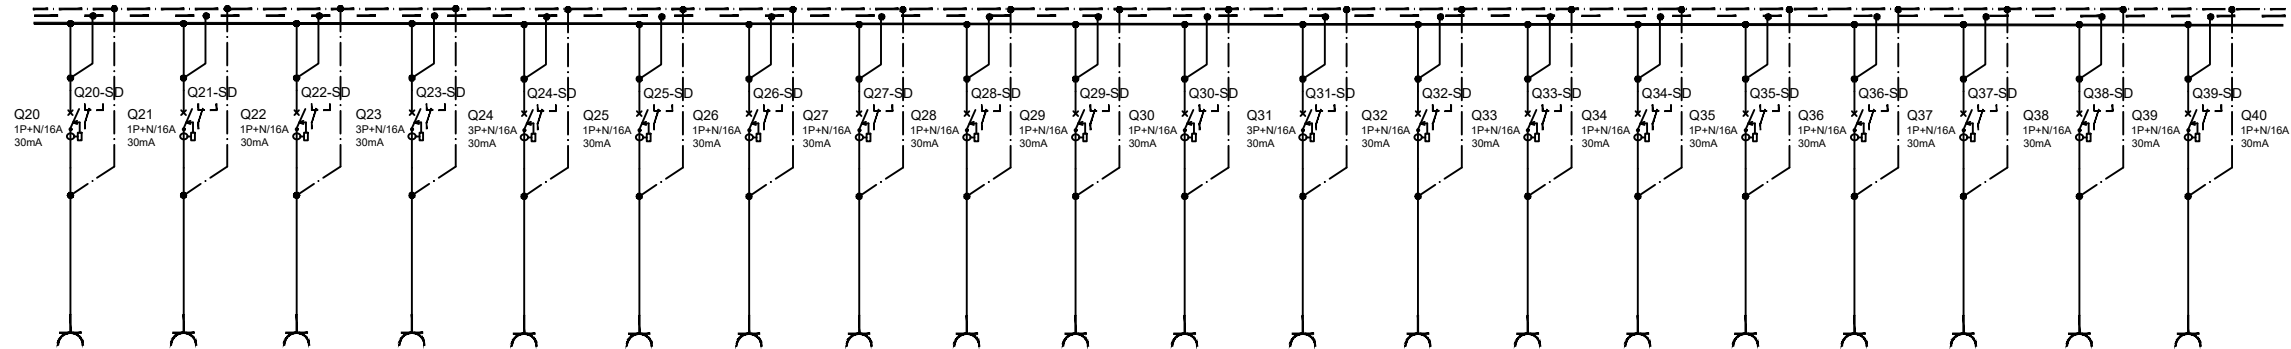

CP8	CP9	CP10	CP11	CP12	CP13	CP14	CP15	CP16	CP17	CP18	CP19	CP20	CP21	CP22	CP23	CP24	CP25	CP26	CP27
2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66
N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA
L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1
Circ prize cabinete	Circ prize cabinete	Circ prize cabinete	Circ prize gr sanitar	Circ prize salon	Circ prize console	Circ prize console	Circ prize salon	Circ prize salon	Circ prize console	Circ prize console	Circ prize salon	Circ prize salon	Circ prize console	Circ prize console	Circ prize salon	Circ prize salon	Circ prize console	Circ prize console	Circ prize salon

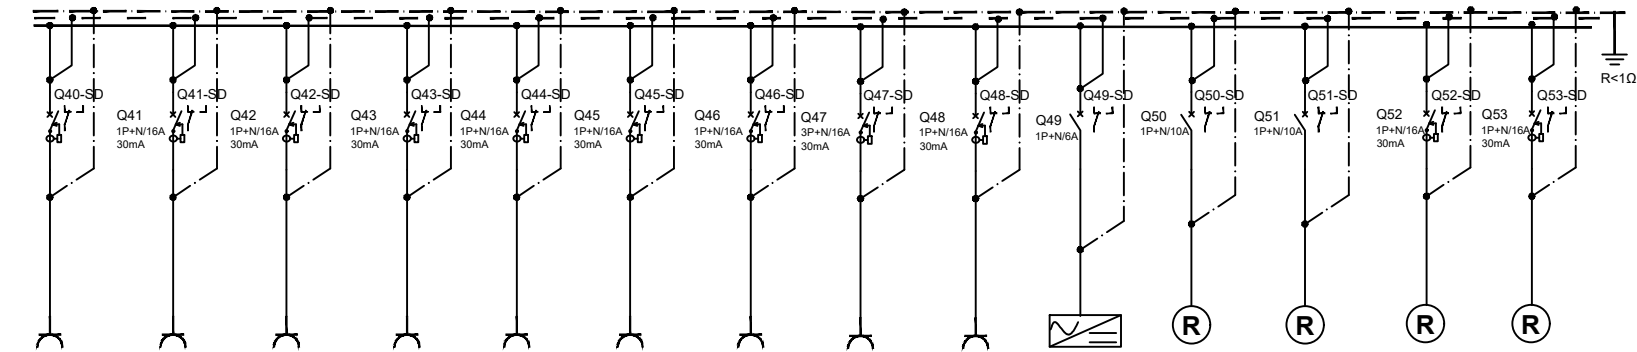

CP28	CP29	CP30	CP31	CP32	CP33	CP34	CP35	CP36	CC1	R1	R2	R3	R4
2	2	2	2	2	2	2	2	2	0.05				
2	2	2	2	2	2	2	2	2	0.05				
9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	9.66	0.24				
N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x2,5 1P+N/16A/30mA	N2XH 3x1,5 1P+N/6A	1P+N/10A	1P+N/10A	1P+N/16A/30mA	1P+N/16A/30mA
L2	L3	L1	L2	L3	L1	L2	L3	L1	L1	L1	L2	L3	L1
Circ prize salon	Circ prize console	Circ prize console	Circ prize salon	Circ prize salon	Circ prize console	Circ prize console	Circ prize salon	Circ prize hol	Circ sursa cc	Rezerva	Rezerva	Rezerva	Rezerva

SPECIFICATIE TEHNICA TABLOU ETAJ 2-TR1 - TE-E2.1			
NR CRT	DENUMIREA ECHIPAMENTULUI	FABRICAT	BUC
Q0	Intrerupator automat 4P/80A, curba C,-Icu= 10kA cu protectie la suprasarcina si scurtcircuit	Eaton sau similar	1
Q1-Q12 Q50-Q51	Intrerupator automat 1P+N/10A, curba C,-Icu= 10kA cu protectie la suprasarcina si scurtcircuit	Eaton sau similar	14
Q13-Q48 Q52,Q53	Intrerupator automat 1P+N/16A + modul protectie diferentiala 30mA,-Icu= 10kA curba C, cu protectie la suprasarcina, scurtcircuit si diferentiala	Eaton sau similar	38
Q55	Intrerupator automat 1P+N/6A, curba C,-Icu= 10kA cu protectie la suprasarcina si scurtcircuit	Eaton sau similar	1
Q0-SD - Q53-SD Q0-SP -	Contact auxiliar semnalizare declansare intrerupator Contact auxiliar semnalizare pozitie intrerupator	Eaton sau similar	54



Proiectant de specialitate:

EDEN DESIGN

Nr. Certificat: 01936
ISO 9001: 2008

Nr. Certificat: 00755
ISO 14001: 2004

Nr. Certificat: 01936
OHSAS 18150

S.C. EDEN DESIGN S.R.L., 403/203/1995, CUI R07116623
Str. Depozitelor nr. 8-10, Municipiul Pitești, Jud. Argeș
Tel/fax: 0248 610 155; e-mail: office@eden-design.ro; web: www.eden-design.ro;

Specificatie	Nume	Semnat	Scara:
Proiectat:	ing. Nedelescu Razvan		
Desenat:	ing. Nedelescu Razvan		Data: MAR 2022
Verificat:	ing. Predescu Razvan		

Beneficiar / AUTORITATEA CONTRACTANTA:
Spital de Pneumoftiziologie,, Sf. Andrei"-Valea Iasului

Amplasament: Com. Valea Iasului

Nr proiect:
2/2022

Titlu proiect:
Reabilitare/consolidare si extindere infrastructura electrica si de fluide medicale la Spital de Pneumoftiziologie,, Sf. Andrei"-Valea Iasului

Faza proiect:
PT

Titlu plansa:
SCHEMA ELECTRICA TABLOU ETAJ 2-TR1- TE-E2.1

Nr.plansa:
IECT 66