


TABLOU ELECTRIC TE- B (corp F-BUCATARIE)

380/230V, 50Hz

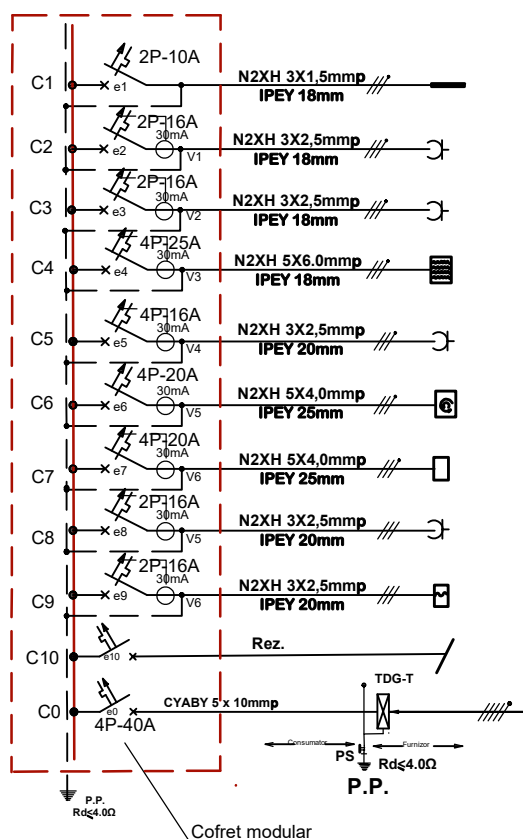

nr. rec.	Pi [kW]	destinatie
4LL	0,20	circ. ilum. bucatarie
1LP	0,50	circ. prize monofazate dulap refrigerare
1LP	0,50	circ. prize monofazate frigider
1LF	12,00	circ. trifazat plita electrica
1LP	1,00	circ. alimentare hota electrica
1LF	7,40	circuit alimentare M.S.V.
1LF	6,00	circ. alimentare cuptor electric
1LP	0,50	circ. alimentare hota evacuare
1LF	0,50	circ. alimentare ventilator
Rez.	1,400	
Pi = 30,00 KW		
Pa = 21,00 KW		
Cs = 0,70		
U= 400/230V		
f= 50 Hz		
Ic= 33.80A		

Lista aparataj:

- e1- disjuncteur bipolar 10A, 230V, 50Hz,
- eo - intrerupator tripolar 40A, 400V, 50Hz,
- e2,e3,e5, e8, e9- disjuncteur bipolar 16A, 230V, 50Hz, cu protectie diferentiala
- e4- disjuncteur tripolar 25A, 400V, 50Hz
- e6, e7 - disjuncteur tripolar 20A, 400V, 50Hz

Nota :
LF- Loc forta